



SEDIMENT AND EROSION CONTROL

1. INSTALL ALL SEDIMENT & EROSION CONTROL MEASURES IN ACCORDANCE WITH MANUFACTURER'S DIRECTION OR THE DETAILS PROVIDED.
2. THE CONTRACTOR IS RESPONSIBLE FOR ALL EROSION CONTROL. SHALL TAKE ALL MEASURES NEEDED TO MINIMIZE EROSION TO THE GREATEST EXTENT POSSIBLE, AT NO ADDITIONAL COST TO THE OWNER, REGARDLESS OF DETAIL SHOWN ON THESE PLANS.
3. CONTRACTOR SHALL INSPECT AND REPAIR ALL SEDIMENT AND EROSION CONTROL MEASURES AFTER EACH RAINFALL AND NOT LESS THAN ONCE A WEEK.
4. SEED AND FERTILIZE & MULCH ALL FINISH GRADED AREAS WITHIN 72 HOURS OF FINISH GRADING.
5. SEED AND MULCH ALL DISTURBED AREAS THAT WILL NOT BE WORKED WITHIN THE NEXT FIFTEEN DAYS.
6. NO SOIL SHALL BE LEFT IN A DISTURBED AREA OR NON-VEGETATED CONDITION FOR MORE THAN 45 DAYS.
7. SILT FENCES SHALL BE REPLACED WHEN CLOGGED AND NO LONGER FUNCTIONAL.

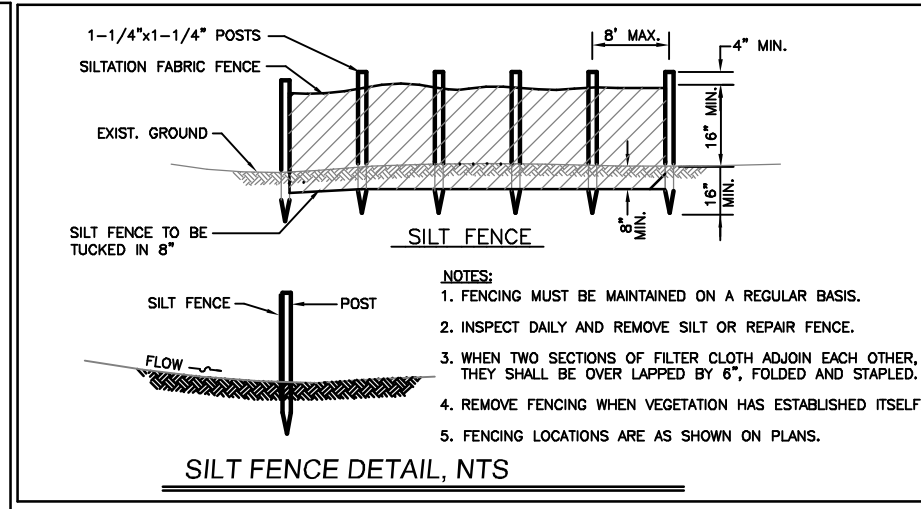


SEQUENCE OF WORK


1. INSTALL SILT FENCE IN ACCORDANCE WITH MANUFACTURER'S DIRECTIONS, IN LOCATIONS DETAILED ON THE PLANS.
2. CLEAR AND GRUB AREAS SUBJECT TO IMPROVEMENT.
3. STRIP AND STOCKPILE TOPSOIL.
4. RE-GRADE LANDING HILL.
5. LOAM, SEED AND MULCH BALANCE OF SITE.
6. REMOVE SILT FENCE AFTER ALL UPHILL SOILS ARE STABILIZED.

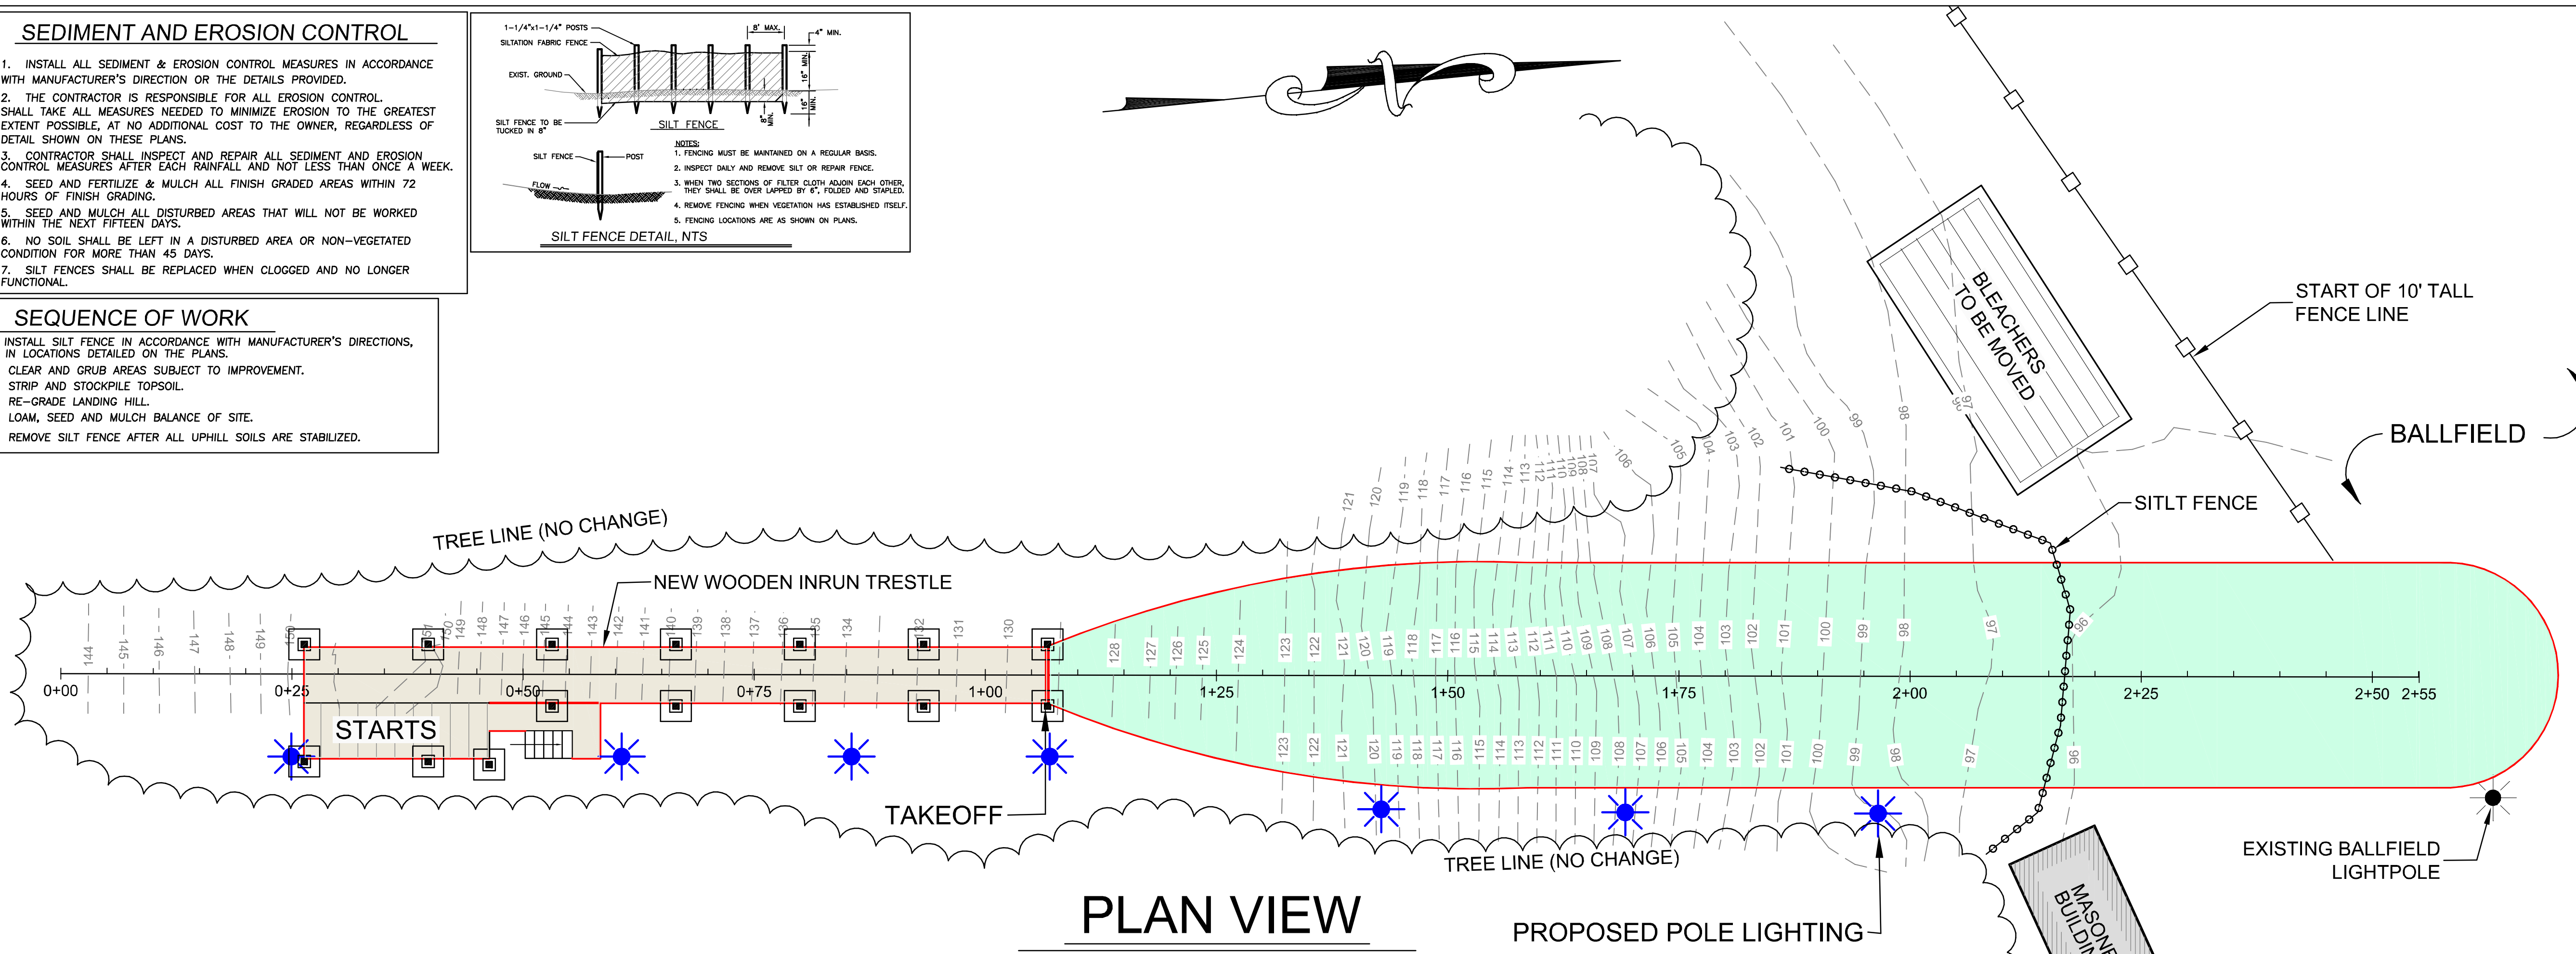

PLAN VIEW

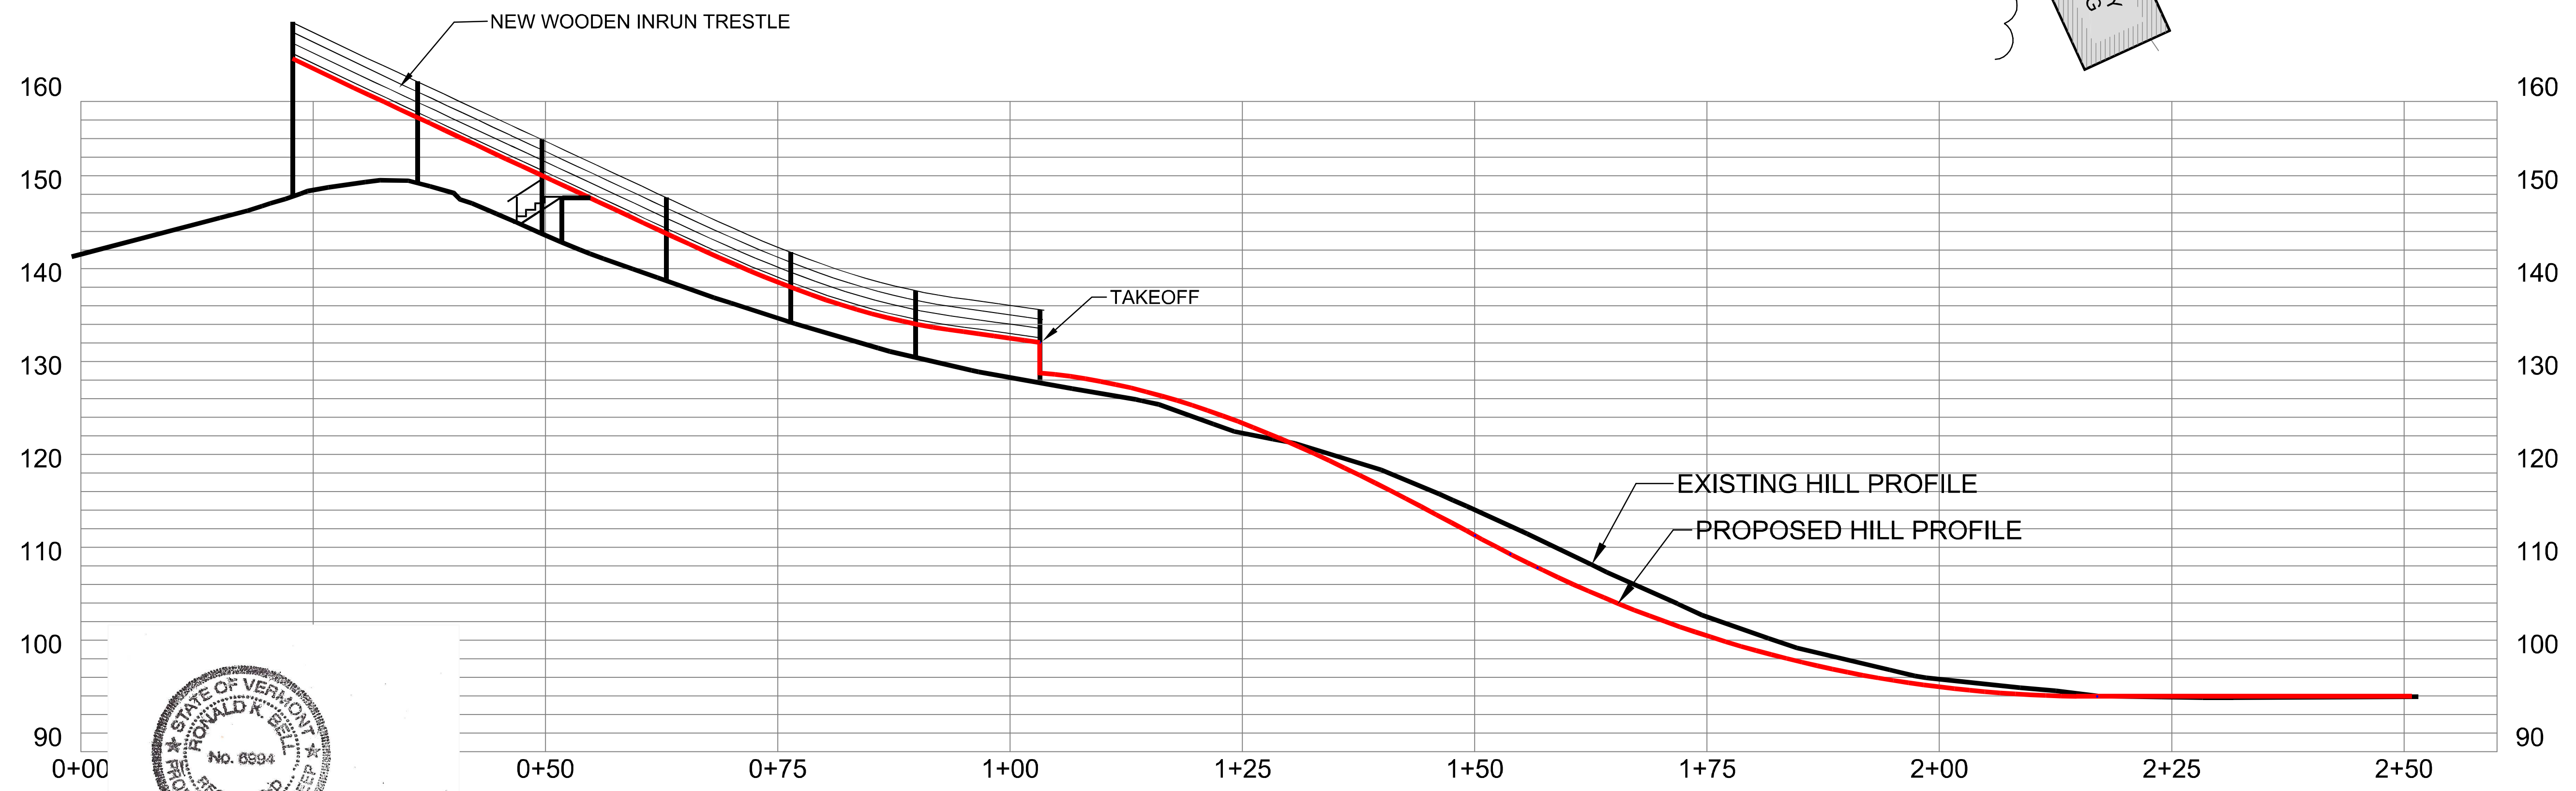

PROFILE VIEW

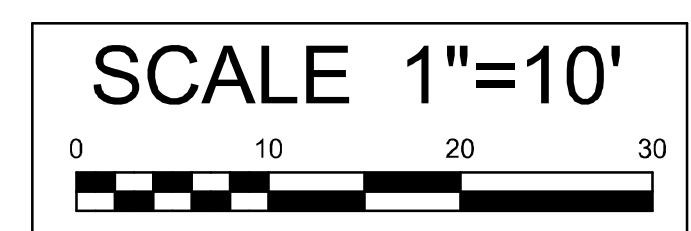

STATE OF VERMONT
 HOWARD K. BELL
 No. 6594
 REGISTERED PROFESSIONAL ENGINEER
Ronald K. Bell

BELL ENGINEERING
 CIVIL & ENVIRONMENTAL
 17 ECHO COVE WAY, SPOFFORD, NH 03462
 (603) 363-9566
 bellengineering@myfairpoint.net

PROJECT:
MEMORIAL PARK JUMP
BRATTLEBORO VERMONT

SHEET TITLE:
SKI JUMP MODIFICATIONS

SCALE:
 1" = 10'

DATE:
 OCT. 11, 2018

SHEET
1